

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 1 283 590 A2**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
12.02.2003 Bulletin 2003/07

(51) Int Cl.7: **H02M 7/217**(21) Application number: **02292011.0**(22) Date of filing: **09.08.2002**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR**  
**IE IT LI LU MC NL PT SE SK TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(71) Applicant: **Somfy SAS**  
**74300 Cluses (FR)**

(72) Inventor: **Bruno, Serge**  
**74460 Marnaz (FR)**

(30) Priority: **10.08.2001 FR 0110732**


(74) Representative: **Cabinet Hirsch**  
**34, Rue de Bassano**  
**75008 Paris (FR)**

(54) **Unregulated electrical converter**

(57) An AC-DC voltage converter includes input terminals with a series circuit connected between the input terminals. The series circuit includes a switching element and a capacitor. The discharge of the capacitor supplies the output voltage of the converter. A control circuit controls the operation of the switching element so that the conducting state of the switching element is

controlled exclusively as a function of the input voltage, while the nonconducting state of the switching element is controlled exclusively as a function of the output voltage.

The converter has a good dynamic range and allows accurate measurement of current consumption at the output.

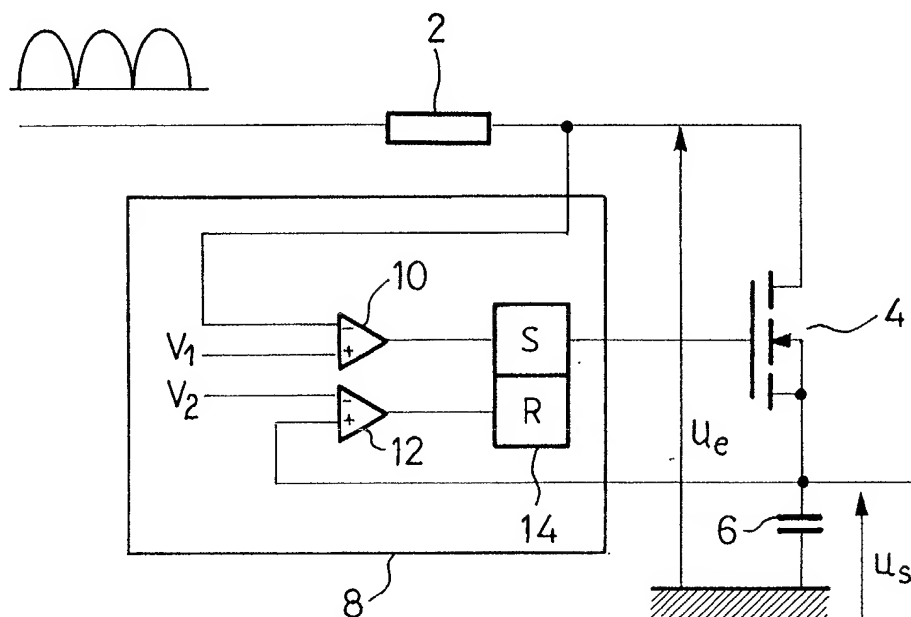**FIG\_1**

## Description

**[0001]** The invention relates to the field of electrical power converters, and more specifically, to AC-DC conversion circuits using a principle of intermittently charging a capacitor.

**[0002]** Such converters are notably used directly for motorized products in buildings, such as small screens for solar protection, venetian blinds, etc. They make it possible to convert the AC voltage from the power mains ("mains") into a lower virtually DC voltage capable of being used to supply an actuator with a low-power DC motor, for example of the CONCEPT-25 type product manufactured by the applicant. They may also supply only the control electronics of a more powerful AC motor, for example, for roller shutters, or a single sensor combined with a radio frequency receiver or transmitter.

**[0003]** These converters are termed "unregulated" because they operate without their output voltage being tied to a fixed reference. This simplifies the structure of the converter and lowers the cost thereof. At the input, these converters receive an AC current, which may or may not be rectified; the half-wave or full-wave rectification of an AC current is considered in the present description as known in the art and is not described. At the output, these converters provide a virtual DC voltage with an amplitude less than the peak amplitude of the input voltage. In the remainder of the description, it is assumed that the input voltage is the mains voltage. This assumption is the most common for applications in buildings. It is clear, however, that other applications are possible, and that the input AC current of the converter, whether or not rectified, is not limited to the current supplied by the mains. These converters are called low-power converters, in that it is possible to tolerate therein a lower conversion efficiency than in a high-power plant, and therefore proportionally larger losses. The output power is typically less than 50 W.

**[0004]** In principle, as explained for example in Figure 1 of US-A-4 641 233, the converters use the intermittent charging of a high-capacitance capacitor, hereinafter called C. In this context, the term "high capacitance" refers to capacitances which are often greater than 100  $\mu$ F. However, it will be understood that the capacitance of the capacitor used is simply sufficient for maintaining enough output voltage between the periods of intermittently charging the capacitor. As a result, the capacitance of the capacitor depends on the variation in voltage accepted at the output of the voltage converter, on the output current needed, and on the charging frequency, which itself depends on the input voltage frequency. For low output currents or for a high frequency of the input voltage, a capacitor with a lower capacitance at this threshold of 100  $\mu$ F could be used. A switching element, hereinafter called Q, is placed between the half-wave or full-wave rectified mains and this capacitor C, so as to charge the latter only during time periods when the mains voltage remains below a given threshold. For

a given load, it is thus possible to dimension C and to choose the threshold voltage so as to comply with a given service voltage and a given waveform at the output of the converter.

**[0005]** US-A-4 001 668 (Lewis 1973) describes a device of this sort in Figure 4. This patent emphasizes the very high tolerance to variations in the mains voltage, allowing the use of such a circuit to supply a motor with DC current whether power is provided by 110-120 V AC mains or from 220-240 V AC mains.

**[0006]** The conducting and non-conducting states of the switching element Q (47) are completely determined by comparison of a voltage, which is an image of the rectified voltage, with a threshold (50, 51, 45). It should be noted that the use of a current limiter formed by a resistor RP (48) and placed upstream of the voltage measuring point makes it possible to benefit from a cumulative effect favoring fast switching of Q from an off state to a conducting state or vice-versa. In Figures 5 and 6, this patent clearly indicates the pulsed shape of the line current (61, 65) and of the downstream voltage waveform at the terminals of the load (therefore at the terminals of C) (62, 66). Patents filed subsequently constitute particular embodiments making it easier to control the switch Q, or improvements relating to the reduction of harmonics generated by current spikes necessary for the periodic recharging of the capacitor.

**[0007]** GB-A-2 203 003 (Sanderson 1987) describes, in generic terms, a topology which is slightly different but based on the same principle. In Figure 2, a current limiting device (11) is inserted between a switching element formed by a field effect transistor and the capacitor (6), the voltage measurement for controlling the switching element being carried out on C (by means of the block referenced 10). This arrangement may remove the possibility of a cumulative effect for the effective control of Q. A device (12) is intended to take the switching element out of service when the voltage at its terminals exceeds a maximum threshold, however, this device is not described.

**[0008]** EP-A-0 763 878 (Helfrich 1995) describes, in Figure 1, a converter topology using a current limiting device RP (R1), a switching element Q (Q1) and a capacitor C (C2) with composite control of Q both by the voltage upstream of RP (R6) and by the downstream voltage (R6). However, the voltage threshold is the same for the conducting and non-conducting state of the switching element.

**[0009]** Other embodiments of converters using this intermittent charge principle are described in DE-A-44 44612, DE-A-31 44742, EP-A-0 399 598, DE-A-32 45238, EP-A-0 249 259, FR-A-2 672 448, EP-A-0 500 113.

**[0010]** EP-A-0 622 889 (Wong 1994) describes a series topology (Q, C) without a current limiter. The input voltage  $V_{in}$  - the voltage of the rectified mains - is applied to the series circuit of the capacitor and of the switching element. This circuit is intended to allow, as in the pre-

vious cases, double charging of C per half-cycle, and therefore to reduce the waveform upstream of a regulator. The device analyzes both the voltage at the terminals of C (15) and the voltage at the terminals of Q (16). Q becomes conducting if the voltage Vcap at the terminals of the capacitor is less than a first given threshold. Q also becomes conducting if the voltage Vds at the terminals of Q, which is the difference between the rectified input voltage and the voltage at the terminals of the capacitor, becomes less than a second given threshold. In one half-cycle, this allows the capacitor to be charged when the voltage increases from zero, then the capacitor to be charged when the voltage decreases to zero.

[0011] US-A-4 641 233 (Roy 1985) describes, with reference to Figure 1, a similar topology. The switching device, a bipolar transistor, becomes conducting if the output voltage of the converter (downstream voltage) is less than the chosen reference voltage. However, the switching device only becomes conducting if the voltage upstream of the switching element is less than a voltage, which is about twenty volts for an output voltage of five volts. This is obtained using a second transistor, which is switched on according to the input voltage, and which switches off the first transistor when the input voltage is too high. According to the patent, the objective of the second transistor is to prevent damaging the components as a result of switching at a high voltage.

[0012] A drawback of this device is that the threshold values for the input voltage and the output voltage are only approximately set. It is known that the conducting threshold voltage of a bipolar transistor or of a single p-n junction are not accurately defined. The proposed solution involves replacing the second transistor by a precision reference-voltage source.

[0013] There is therefore a need for a converter, which makes it possible for the switching element to be accurately controlled, allowing the capacitor to be charged by the input voltage.

[0014] A second drawback of the circuit proposed by Roy is that it artificially limits the dynamic operating range at the output. This is because this circuit prevents the switching element from conducting as soon as the upstream voltage exceeds a fixed threshold, although it is quite possible that when this threshold is reached, the capacitor C is not yet sufficiently recharged. This effect will occur on the rising edges of the rectified sinusoid. It is therefore beneficial in order to prevent limiting the dynamic operating range of the circuit to choose a high threshold for the upstream voltage.

[0015] A third drawback of the circuit proposed by Roy appears on the falling edges of the rectified sinusoid. This is because if the capacitor is discharged, the switching element becomes conducting as soon as the upstream voltage goes below the fixed threshold. If this threshold for the upstream voltage is high it becomes conducting at a higher voltage when going back below the threshold, this time during the falling edge of the rectified sinusoid. This results in an operation which is more

damaging to the component, and therefore in overdimensioning thereof, and a risk of incompatibility with the electromagnetic compatibility standards. It is therefore beneficial to choose a low threshold for the upstream voltage.

[0016] The invention is based on the demonstration of these contradictory requirements in Roy's circuit and on the discovery of the corresponding problem. There is therefore a need for a converter which does not limit the dynamic operating range at the output, but which nevertheless allows the components to be protected, and which limits the risks of electromagnetic incompatibility. It would also be beneficial for the converter to be able to measure the consumption of a device which it supplies.

[0017] Moreover, it may be necessary to transmit a single signal over an electrical line for supplying actuator(s) or sensor(s), which in particular, may involve an alarm signal, a fault signal, or an acquisition signal in the actuator configuration phase, or a security signal for a sensor or the like. It is of course possible to use a medium other than the electrical supply line, for example radio transmission, or a specific conductor for transmitting the signal. However, it is beneficial to use the electrical line, which avoids providing another medium. It has been proposed in US-A-3 852 740 (Haynes 1973), US-A-4 121 201 (Weathers 1974) or else in US-A-4 755 792 (Pezzolo 1987) to use carrier current technologies to transmit a signal over a supply line. These technologies are complex and their reliability is not guaranteed if carried out at low cost. They are not suitable for very limited data transmission. There is therefore a need for simple and reliable transmission of a signal, over the supply line of an actuator or a sensor.

[0018] FR-A-2 785 735 discloses a voltage converter. The converter has a capacitor, which is charged at most once per half-wave of the rectified input AC voltage, close to the beginning of the half-wave. Specifically, the rectified input AC voltage is applied to the capacitor through a switch. The switch is controlled to be opened whenever the output voltage across the capacitor is higher than a first threshold. The switch is controlled to be closed whenever the difference between the input voltage and the output voltage is higher than a second threshold, which may be zero. Thus, the switch is closed not exclusively based on the input voltage, but rather according to the difference between the input voltage and the output voltage. This may cause damage to the components of the converter if the switch is closed while the input voltage is high.

[0019] US-A-5 818 708 discloses a voltage converter. Rectified input AC voltage is applied to a load capacitor through a switch. The switch is controlled by a latch circuit. The switch is turned on upon receiving a set input, and is turned off upon receiving a reset input. The set input of the latch is connected to a first voltage sensor, which senses the voltage provided by the rectifier. The reset input of the latch is connected to a second voltage

sensor, which senses the voltage across the load capacitor. The first voltage sensor enables the set input of the latch when the voltage provided by the rectifier is higher than a low (typically zero) voltage. This turns the switch on. The second voltage sensor enables the reset input of the latch when the voltage provided by the rectifier is higher than the desired output voltage, which turns the switch off. In this converter, the capacitor is exclusively charged on the rising edge of the input voltage.

**[0020]** In one embodiment, the invention therefore provides a voltage converter with input terminals, a series circuit between the input terminals, the series circuit comprising a switching element and a capacitor. The discharge of the capacitor supplies the output voltage of the converter. The circuit also comprises a control circuit of the switching element, which controls the conducting state of the switching element exclusively as a function of the input voltage and controls the non-conducting state of the switching element exclusively as a function of the output voltage.

**[0021]** Advantageously, the control circuit controls the conducting state of the switching element when the input voltage is less than a first threshold, and controls the non-conducting state of the switching element when the output voltage is greater than a second threshold. In this case, the first threshold may be higher than the second threshold so that the capacitor is charged on both rising and falling edges of the input voltage.

**[0022]** In another embodiment, the invention therefore provides a voltage converter with input terminals, a series circuit between the input terminals, the series circuit comprising a switching element and a capacitor. The discharge of the capacitor supplies the output voltage of the converter. The circuit also comprises a control circuit of the switching element. This circuit sets the switching element to the conducting state when the input voltage is less than a first threshold. It also sets the switching element to the non-conducting state when the output voltage is greater than a second threshold, which is lower than first threshold

**[0023]** It is possible to provide in the converter a half-wave or full-wave rectifier, the output of which supplies the series circuit. It is also possible to add a current limiting element, especially a resistive or inductive element, mounted in series with the series circuit.

**[0024]** In one embodiment, the switching element comprises an input terminal, an output terminal and a control terminal, the control voltage supplied by the control circuit being applied between the control terminal and the output terminal. The switching element thus has a substantially constant conducting threshold between the control and output terminals, the switching element becoming conducting between the input and output terminals when this conducting threshold is reached. An MOS transistor is an example of such a switching element.

**[0025]** In this case, the control circuit may have a sin-

gle input connected to one terminal of the series circuit, one output connected to the control terminal of the switching element and an earth connected to the other terminal of the series circuit. More specifically, the control circuit may comprise a voltage source, driven by the input, delivering a voltage which remains virtually constant while the input voltage is greater than a first threshold, and otherwise decreases, a second capacitor, one terminal of which is connected to the earth of the control circuit, and a controlled inverter, the swivel of which is connected to the other terminal of the second capacitor.

**[0026]** This inverter selectively connects the second capacitor either to the voltage source in a first position, or to the output of the control circuit in a second position. The inverter toggles from the first to the second position when the voltage delivered by the voltage source decreases; it toggles from the second to the first position when the output voltage is greater than a second threshold, or when the difference between the output voltage of the control circuit and the output voltage of the converter becomes less than the threshold of the switching element.

**[0027]** In one embodiment, the controlled inverter comprises a diode between the voltage source and the second capacitor, a second transistor of the bipolar type, the transmitter of which is connected to the second capacitor and the collector of which is connected to the output of the control circuit, and a resistor between the voltage source and the base of the second transistor.

**[0028]** The voltage source may comprise a Zener diode between the earth and the terminal of the diode which is not connected to the second capacitor; in this case, the Zener diode is connected to the input of the control circuit through a resistor, and placed in parallel with another resistor.

**[0029]** It is possible to provide, in the converter, means of measuring the temporal position of at least one falling edge of the control voltage applied to the switching element. It is also possible to provide means of measuring the value of the output voltage, the measuring means being controlled by the control voltage applied to the switching element.

**[0030]** The invention also proposes a combination of such a converter and of a load supplied with voltage by the output voltage of the converter. The load advantageously has means to generate overconsumption, or at least one passive element selectively supplied by the output voltage.

**[0031]** The invention also proposes a unit having a current pulse-width detector or a time detector separating current pulses; and such a combination.

**[0032]** Finally, the invention relates to a method of transmitting data between at least one such combination and a detector placed on an electrical supply line of the converter for the combination or combinations. The method comprises varying the consumption of the load of a combination; and detecting a variation in the temporal position of at least one current pulse using the de-

tor.

**[0033]** This detection step comprises detecting a variation in the temporal width of at least one current pulse using the detector, or else detecting a variation in the time between the falling edge of a pulse and the rising edge of the following pulse using the detector.

**[0034]** The method especially makes it possible to transmit a data item which is an alarm, or a data item concerning the normal operation of a load.

**[0035]** Other characteristics and advantages of the invention will become apparent on reading the following description, given by way of example and with reference to the drawings which show

- Figure 1, a schematic view of a specific embodiment of a converter according to the principle of the invention;
- Figure 2, a graph of the input voltage, of the control voltage and of the input current in the converter of Figure 1, as a function of time;
- Figure 3, a schematic view of a specific embodiment of a converter according to a preferred embodiment of the invention;
- Figure 4, a more detailed view of a converter of the type in Figure 2;
- Figure 5, a representation of a conventional rectifying circuit supplying power to a load RU, with filtering by a capacitor;
- Figure 6, a graph of the output voltage of the circuit of Figure 4;
- Figures 7 and 8, schematic views of specific embodiments of microcontrollers capable of being used according to the invention in its application to measuring the current output in the downstream direction (or output current);
- Figure 9, a graph of the input current to a converter, in a first operating state of a device connected to the converter;
- Figure 10, a graph of the line current supplied to three converters, when the devices connected at the output of these converters are all in a first operating state;
- Figure 11, a graph of the line current supplied to three converters, when two of the devices connected at the output of these converters in a first operating state while the third device is in a second operating state; and
- Figure 12, a schematic representation of a detector for detecting a change of operating state of a device connected to an output of this converter.

**[0036]** The invention provides an AC-DC voltage converter with input terminals, a series circuit between the input terminals, where the series circuit comprises a switching element and a capacitor delivering the output voltage. The converter further comprises a circuit for controlling the switching element. The control circuit controls the conducting state of the switching element

exclusively as a function of the input voltage and controls the non-conducting state of the switching element exclusively as a function of the output voltage.

**[0037]** As the non-conducting state of the switching element is exclusively a function of the output voltage, the switching element remains conducting when the output voltage is too low, independent of the value of the input voltage applied to the terminals of the series circuit. The capacitor continues to be charged as needed, even if the input voltage exceeds a threshold value. The converter provided therefore has a larger dynamic range than in the solution disclosed in US-A-4 641 233 or GB-A-2 203 003. This is because the dynamic range of the output voltage of the converter is not limited by a threshold value of the input voltage.

**[0038]** As the conducting state of the switching element is exclusively a function of the input voltage, it is possible to protect the components of the circuit against any damage resulting from a conducting state under a high input voltage. It is therefore not necessary to "over-dimension" or "over-design" the components of the converter, and it is possible to limit the risk of electromagnetic incompatibility. Use of oversized components, or in other words, components having higher ratings than needed, may be uneconomical

**[0039]** The control circuit may control the conducting state of the switching element when the input voltage is less than a first threshold V1. This makes it possible to use simple elements for making the control circuit. This is also a simple embodiment where the control circuit passes the switching element to the conducting state exclusively as a function of the input voltage.

**[0040]** Similarly, the control circuit may control the non-conducting state of the switching element when the output voltage is greater than a second threshold V2. This is also a simple embodiment where the control circuit passes the switching element to the non-conducting state exclusively as a function of the output voltage.

**[0041]** Selecting a first threshold value higher than the second threshold value makes it possible to charge the capacitor not only on the rising edge of the input voltage, but also on the falling edge of the input voltage. This increases again the dynamics of the converter and the ability of the converter to provide the output current. As discussed below, this condition, however, is not necessary, e.g., for measuring the power delivered by the converter as discussed in reference to figures 5 and following.

**[0042]** Figure 1 shows a schematic view of a converter according to one embodiment of the invention. At the input (or upstream), the converter receives an AC voltage rectified by any suitable means, as shown diagrammatically in the figure in the case of full-wave rectification. This voltage is applied to a resistive or inductive current limiting element 2, the function of which is to limit the current flowing through the switching element and the capacitor when the switching element is conducting. Moreover, the current limiting element is connected to

the series circuit of the switching element 4 - an MOS transistor in the example - and of the capacitor 6. The terminals of the capacitor form the output terminals of the converter. In the figure, the voltage at the terminals of the series circuit of the switching element and of the capacitor is referenced  $U_e$ , which subsequently will be termed the upstream voltage, or input voltage. In the figure, the voltage at the terminals of the capacitor is referred to as  $U_s$ , which subsequently will also be termed the downstream voltage or output voltage. The converter also comprises a control circuit 8. The control circuit is connected to the control input of the switching element. Moreover, it receives the voltage  $U_e$  and the voltage  $U_s$ . For this purpose, in the schematic circuit of Figure 1, the control circuit has first and second input terminals respectively connected between the current limiting element 2 and the switching element 4, and between the switching element 4 and the capacitor 6 on the other hand.

**[0043]** The control circuit comprises a first comparator 10, the inverting input of which is connected to the first input terminal, and to the non-inverting input of which a first reference voltage V1 is applied. The output of the first comparator is applied to the set input S of a latch 14. The control circuit comprises a second comparator 12, the non-inverting input of which is connected to the second input terminal, and to the inverting input of which a second reference voltage V2 is applied. The output from the second comparator is applied to the reset input R of the latch 14. The output from the latch provides the control signal delivered by the control circuit, and is therefore connected to the control input of the switching element 4.

**[0044]** The converter of Figure 1 operates as follows. It is assumed that the switching element is conducting. The capacitor 6 is charged by the current passing through the limiting element, the switching element, and the capacitor. When the voltage  $U_s$  at the terminals of the capacitor exceeds the second reference voltage V2, the latch 14 changes state, and the switching element 4 becomes non-conducting. The charging of the capacitor ceases. Thus, the capacitor by the input voltage ceases charging as soon as the voltage at the terminals of the capacitor exceeds a limiting value dictated by the second reference voltage V2. Further, the non-conducting state of the switching element depends exclusively on the voltage  $U_s$ , but does not depend on the voltage  $U_e$ . This is not a problem. In fact, when the switching element is conducting, the voltage at its terminals is obviously zero (or very low), and making it non-conducting does not subject it to any particular stress, and does not cause problems from the EMC point of view. Of course, the switching element Q should preferably be able to withstand a voltage equal to the amplitude of the mains voltage. Here it is understood that the current limiting element could be omitted from the circuit of Figure 1. Moreover, in the presence of this current limiting element, the value of the current flowing in the switching

element is limited by the element 2. This may make it easier to dimension the switching element so that it withstands passage of the capacitor charging current.

**[0045]** Starting from this state, when the upstream voltage  $U_e$  goes below the first reference voltage V1, the first comparator applies a signal to the set input of the latch, and the latch changes to a new state. The switching element is then turned on. As the conducting state does not depend on the downstream voltage, but only on the upstream voltage, it is possible to select the time at which it is made conducting, such that the voltage at the terminals of the switching element is as small as desired.

**[0046]** The circuit of Figure 1 therefore makes it possible to preserve the dynamic range of the converter, and to protect the components. It therefore mitigates the second and third drawbacks of the Roy circuit, as explained above.

**[0047]** In the example of Figure 1, the output voltage is measured at the terminals of the capacitor 6, and the input voltage is measured at the terminals of the series circuit of the switching element and of the capacitor. It will be noted that when the switching element is not conducting, the voltage at the terminals of the current limiting element is zero. As such, the input voltage may be measured equally at the terminals of the series circuit of the switching element and of the capacitor, or at the terminals of the circuit having the current limiting element, the switching element, and the capacitor in series. Similarly, when the switching element is conducting, the voltage at the terminals of the series circuit of the switching element and of the capacitor is equal to the voltage at the terminals of the capacitor 6, ignoring the voltage drop at the terminals of the switching element 4. Thus, if it is known when the switching element is conducting, it is possible to use the voltage at the terminals of the series circuit of the switching element and of the transistor to control the non-conducting state. More generally, the point of measuring the input voltage and the output voltage may vary depending on the solutions given in the examples of the figures.

**[0048]** In this embodiment, the converter also mitigates the first drawback because the switching times do not depend on the properties of the switching element. It would also be possible to use a converter of the type of Figure 1 with a switching element of another type.

**[0049]** Figure 2 is a graph of the upstream voltage  $U_e$  and of the control voltage  $U_c$  in the converter of Figure 1, as a function of time. In the example of this figure, the first reference voltage V1 is higher than the second reference voltage V2. This ensures that the capacitor is loaded not only on the rising edge of the rectifier input voltage, but also on the falling edge of the rectified input voltage.

**[0050]** The control voltage  $U_c$  is the output voltage of the control circuit, applied to the control input of the switching element. The graph corresponds to the example of full-wave rectification, and shows several half-cy-

cles. The upstream voltage or input voltage  $U_e$  has been plotted in dotted lines on the figure; at time  $t = 0$ , the input voltage is a maximum, and it is assumed that the switching element is not conducting. On the falling edge of the first half-cycle, the switching element becomes conducting at time  $t_1$  when the upstream voltage  $U_e$  goes below the first reference voltage  $V1$ . The capacitor is charged on the falling edge of the first half-cycle until the upstream voltage  $U_e$  becomes less than  $U_s$ , and on the rising edge of the second half-cycle, as soon as the upstream voltage  $U_e$  exceeds  $U_s$  and until the downstream voltage reaches the threshold value  $V2$ , at time  $t_2$ . This time depends on the rate of charging of the capacitor, and therefore on the downstream consumption of the converter. The operation is similar on the falling edge of the second half-cycle, and on the rising edge of the third half-cycle, becoming conducting at time  $t_3$  and non-conducting at time  $t_4$ .

**[0051]** It is assumed that the consumption of the device placed downstream of the converter then increases. On the falling edge of the third half-cycle, the switching element is switched on at time  $t_5$ , independent of the consumption. On the rising edge of the fourth half-cycle, the capacitor is charged more slowly because of the consumption of the device placed downstream of the converter. The threshold voltage  $V2$  is only reached at a time  $t_6$ , with a charging duration  $t_6 - t_5$ , which is greater than the charging duration  $t_4 - t_3$  during the previous cancellation of the voltage. The same phenomenon is found on the rising edge of the following half-cycle, at time  $t_8$ .

**[0052]** The graph also shows the control voltage  $U_c$ . It is found that this control voltage  $U_c$  has marked rising and falling edges, which are representative of the times at which the switching element becomes conducting and non-conducting. The circuit therefore provides a voltage-calibrated signal ( $0 \pm V$ ), which exactly indicates the start and finish times at which the switching element becomes and ceases to be conducting. The duration for which this signal remains at the high level is representative of the downstream consumption of the converter.

**[0053]** It is also found that the times  $t_1$ ,  $t_3$ ,  $t_5$  and  $t_7$  of becoming conducting have a temporal position which is fixed with respect to the voltage half-cycles applied to the converter. This is explained by the fact that becoming conducting depends only on the voltage applied to the input of the converter, and does not depend on the output voltage. However, the times  $t_2$ ,  $t_4$ ,  $t_6$  and  $t_8$  at which the switching element becomes non-conducting are a function of the downstream voltage and of the output consumption of the converter. The circuit of Figure 1 makes it possible, by analyzing the temporal position of these times  $t_2$ ,  $t_4$ ,  $t_6$  or  $t_8$ , to measure the output consumption of the converter. This is explained in more detail below with reference to Figure 5. This analysis may be carried out by measuring the time between the rising and falling edges of the control voltage.

**[0054]** Finally, the graph shows the shape of the line current,  $i$ , supplying the converter. In the vicinity of the

zero voltage points, the graph is approximated. Depending on the consumption, the current has a waveform  $iL_1$  or  $iL_2$ .

**[0055]** Figure 3 is a schematic view of a converter according to a preferred embodiment of the invention. The example of Figure 3 makes it possible to use a control circuit having a single input, while ensuring that the control circuit controls the conducting state (and the non-conducting state, respectively) from just one of the upstream and downstream voltages. This has the advantage of simplifying the converter structure. Furthermore, the circuit of Figure 3 makes it possible to use a single voltage reference instead of the two voltage references shown in Figure 1. The circuit of Figure 3, like that of Figure 4, uses an MOS transistor as a switching element. This MOS transistor is an example of a switching device which has a substantially constant conducting threshold between its control and output terminals, and only becomes conducting between its input terminal and its output terminal when this threshold is reached. As this threshold is constant when the transistor is conducting, the voltage  $U_{gm}$  between the transistor gate and earth is equal to the sum of the output voltage  $U_s$  and the conducting threshold  $V_T$  of the transistor. The output voltage may therefore be measured, implicitly, from the output voltage of the control circuit, applied to the gate of the transistor.

**[0056]** In Figure 3, the elements already described with reference to Figure 1 can be recognized, which elements bear the same reference numbers and will not be described again. The switching element comprises an input terminal D, an output terminal S, and a control terminal G, the control voltage being applied between G and S, with the property of having a substantially constant conducting threshold  $V_T$  between control G and output S terminals so that it becomes conducting between D and S when this threshold  $V_T$  is reached.

**[0057]** The control circuit 20 has a single input connected between the current limiting element 2 and the switching element 4. Furthermore, it is connected to earth (also referred to as ground). The control circuit comprises a voltage source 22, which may be driven by the control input. The voltage provided by the source remains virtually constant while the input voltage of the control circuit, which is also the input voltage applied to the device, is greater than a first threshold, and otherwise decreases. Figure 4 shows a practical implementation of such a voltage source. The control circuit further comprises a second capacitor 24 and a controlled inverter 26. The second capacitor has a memory function and has a terminal connected to the earth of the control circuit. The other terminal of the capacitor 24 is connected to the swivel or input terminal of the controlled inverter 26.

**[0058]** In its schematic representation, the controlled inverter is similar to a single-pole double-throw switch. The controlled inverter includes an input terminal, which is connected to the capacitor 24. Toggling or "moving"



between the first and second position of the controlled inverter 26 essentially reciprocally couples the input terminal of the controlled inverter to either the control G of the switching element 4, or to the terminal of the voltage source, as shown in Fig. 3.

**[0059]** In one specific embodiment, a mechanical device having a wiper or component that physically moves or toggles may be used. Such a device may be a mechanical switch, a digitally controlled analog switch or equivalent device, as is known in the art. Preferably, such a mechanical device may be used only if the switching frequency of the controlled inverter was sufficiently low.

**[0060]** Alternatively, according to another specific embodiment, the controlled inverter may be a solid state device, such as a solid state switch. This may be a digitally controlled operational amplifier arranged to have a unity gain. Thus, such amplifiers act as an analog transmission gate. Moreover, digitally or analog controlled analog transmission gates may also be used, as is known in the art. Note, that the control input to the switching device, whether such control input or signal is analog or digital, is not specifically shown in Fig. 3, as operation of such a controlled inverter is known in the art.

**[0061]** The controlled inverter 26 alternates between the first and the second position. In the first position, the controlled inverter connects the second memory capacitor 24 to the voltage source 22. In the second position, the controlled inverter connects the second capacitor 24 to the output of the control circuit. Toggling or switching from the first to the second position takes place when the voltage from the voltage source 22 decreases. Toggling from the second to the first position takes place when the difference between the output voltage of the control circuit and the output voltage of the converter becomes less than the conducting threshold of the switching element.

**[0062]** The operation of the circuit of Figure 3 is as follows. It is assumed at the start that the input voltage of the control circuit is greater than the first threshold V1, the switching element being assumed to be non-conducting. Since the input voltage of the control circuit is greater than the first threshold, the controlled inverter 26 is in the first position, and the second capacitor 24 is charged by the voltage from the source 22. There is no signal applied at the output of the control circuit to the control input of the switching element 4, which therefore remains nonconducting. When the input voltage decreases and goes below the first threshold, the voltage from the source 22 decreases, and the controlled inverter 26 goes into the second position. At this point, the memory capacitor 24 is connected to the output of the control circuit, and therefore applies a voltage to the control terminal G of the switching element. The switching element therefore becomes conducting; it is understood here that the memory capacitor is chosen so as to provide a voltage greater than the conducting threshold of the switching element, and this as soon as it is

charged, even for a brief duration, by the source 22. It is also understood that the conducting state of the switching element depends only on the upstream voltage applied at the input of the control circuit when the switching element is not conducting.

**[0063]** Once the switching element becomes conducting, it remains conducting under the action of the memory capacitor 24 while the controlled inverter is in the second position. When the difference between the output voltage of the control circuit and the output voltage of the converter becomes less than the conducting threshold of the switching element, the inverter 26 goes from the second position to the first position. The switching element is then isolated. It is understood that the non-conducting state of the switching element depends only on the output voltage at the terminals of the capacitor, as measured across the output of the control circuit given the conducting threshold of the transistor, but does not depend on the input voltage applied to the converter.

**[0064]** Thus, as in the circuit of Figure 1, the switching element becomes conducting as a function of the input voltage, but not as a function of the output voltage. The switching element becomes non-conducting as a function of the output voltage, but not as a function of the input voltage.

**[0065]** Figure 3 complies well with the principle of Figure 1, with a first implicit comparator monitoring the upstream voltage, via the driven voltage source and a second implicit comparator monitoring the downstream voltage via the voltage between G and S of the switching element.

**[0066]** In this specific embodiment, the first reference voltage, under which the switching element is conducting, may also be higher than the second reference voltage. This again makes it possible to load the capacitor in both the falling edge and the rising edge of the rectified input voltage.

**[0067]** Figure 4 shows a more detailed view of a converter of the type of Figure 2. The current limiting element, the switching element, the capacitor 6, the control circuit 20 and its second capacitor 24 will be recognized. The input of the control circuit (called A in the figure) is connected to earth through the series circuit of resistors R2 and R4 referenced 28 and 30. A Zener diode 32 connects the common terminal of the resistors 28 and 30, called B in the figure, to earth. This point B is also connected to one terminal of the second capacitor via a diode which is forward biased from B towards the second capacitor. The transmitter of a transistor 36 is connected to the second capacitor 24; the base of this transistor is connected to the point B through a resistor R5 referenced 38. The collector of the transistor is connected to the control input G of the switching element 4 and to earth through a resistor R3 referenced 40.

**[0068]** The voltage U1 is provided by the voltage source to the point B. When the voltage U1 is applied between the control input G of the switching element



and earth, the switching element Q conducts if the voltage U<sub>GS</sub> is greater than or equal to the conducting threshold, therefore while the output voltage U<sub>S</sub> is less than U<sub>1</sub>-V<sub>T</sub>. The downstream threshold V<sub>2</sub> is in this case therefore equal to U<sub>1</sub>-V<sub>T</sub>. The value U<sub>1</sub> is determined for a given threshold, and for a given MOS.

[0069] In the circuit of Figure 4, the inverting contact K is in fact produced by combining the diode 34, the transistor 36 and the resistor R<sub>5</sub> 38. The second capacitor 24 is charged by placing the latter in parallel with the Zener diode 32, through the diode 34.

[0070] It will be assumed for the sake of clarity that the voltage at the terminals of the diode 34 when it is conducting is very small compared to the Zener voltage V<sub>Z</sub> of the Zener diode 34. Therefore, we simply have U<sub>1</sub> = V<sub>Z</sub> = V<sub>2</sub> + V<sub>T</sub>. The value of the Zener voltage is therefore chosen as a function of the conducting threshold of the switching element 6, and of the second reference threshold V<sub>2</sub> (or downstream threshold), above which the switching element becomes non-conducting.

[0071] The second transistor 36 is always off, unless the potential at B becomes less than that at E. The latter situation is encountered when the Thevenin generator equivalent of the assembly (U<sub>A</sub>, R<sub>2</sub>, R<sub>4</sub>) has a voltage less than V<sub>Z</sub>.

[0072] If, following the decrease of U<sub>A</sub> on a falling edge of the rectified half-sinusoid, the voltage U<sub>1</sub> becomes less than the Zener voltage V<sub>Z</sub>, then the second transistor starts to conduct, leading to the switching element starting to conduct. If the switching element starts to conduct, the potential of A decreases, and therefore that of B also decreases, which further reinforces the conduction of the second transistor, etc. There is therefore a cumulative effect.

[0073] At the virtual instantaneous moment when the second transistor and the switching element become conducting, the potential of A goes from the threshold value V<sub>1</sub> to the value U<sub>s</sub> (voltage at the terminals of C), thus confirming the conduction of the second transistor and switching off of the diode 34.

[0074] For a given Zener voltage V<sub>Z</sub>, and for a chosen threshold V<sub>1</sub>, the values of resistors R<sub>2</sub>, R<sub>4</sub> to be used are calculated from the equation:

$$V_1 = \frac{R_2 + R_4}{R_4} V_Z = \frac{R_2 + R_4}{R_4} (V_2 + V_T)$$

[0075] By choosing suitable resistors R<sub>2</sub> and R<sub>4</sub>, the circuit makes it possible for the upstream and downstream thresholds V<sub>1</sub> and V<sub>2</sub> to be chosen freely. Again, one may select V<sub>1</sub> higher than V<sub>2</sub> for ensuring that the capacitor is loaded on both the falling and rising edges of the input voltage.

[0076] The voltage U<sub>GM</sub> at the terminals of the resistor R<sub>3</sub> 40 remains equal to V<sub>Z</sub> during the conduction duration, if the time constant R<sub>3</sub>\*C<sub>2</sub> is high compared to the period, where C<sub>2</sub> is the capacitance of the second capacitor.

[0077] When the voltage at the terminals of the capacitor 6 increases enough to reach V<sub>Z</sub> - V<sub>T</sub>, then the conduction of the switching element tends to decrease, and U<sub>A</sub> increases. The second transistor tends to conduct less, etc. There is a cumulative effect in the other direction: the switching element and the second transistor switch off. The voltage U<sub>GM</sub> is therefore switched off. There is therefore, if necessary, a voltage-calibrated signal, U<sub>GM</sub>, representative of the conduction duration, as explained with reference to Figure 2.

[0078] The circuit of Figure 4 provides a simple solution for implementing the diagram of Figure 3. Of course, other solutions are possible.

[0079] Applications of the circuit of Figures 1 to 4 to measuring the downstream consumption of the converter - Figures 7 and 8 - or to transmitting data along a supply line - Figure 9 onwards, will now be described with reference to Figure 5.

[0080] Figure 5 shows a representation of a conventional rectifying circuit, which supplies power to a load RU, with filtering by a capacitor. The circuit comprises a diode 42 providing half-wave rectification, a current limiter formed by a resistor 44, and a parallel circuit of a capacitor 46 and of an output load RU referenced 48. The output voltage U<sub>s</sub> is the voltage at the terminals of the capacitor. Figure 6 is a graph of the output voltage of the circuit of Figure 5. A half-cycle of the voltage applied at the input to the circuit is shown in solid line, and the theoretical maximum amplitude at the terminals of the load, which is calculated from the previous curve by reducing the ratio RU/(R<sub>P</sub> + RU), is shown in dotted line, while the output voltage is shown in bold line. In such a circuit, it is known that the waveform of the output voltage U<sub>s</sub> is directly related to the current absorbed by the load arranged in parallel on the capacitor. The exact measurement of such a waveform is enough to determine this current, either by calculation, or from a calibration curve. However, this measurement requires knowing both the minimum and maximum of the voltage graph U<sub>s</sub>, identified by their horizontal tangents in Figure 6. This involves continuous sampling of the output voltage so as to determine the minimum and maximum of the output voltage.

[0081] Conversely, as explained with reference to Figure 2, the control voltage of the switching element in the circuit of Figures 1, 3 or 4 has rising edges in a temporal position which is fixed with respect to the time where the voltage is zero, and falling edges whose position is representative of the consumption downstream of the converter. It is therefore possible, by measuring the switching times of the switching element, to determine the consumption downstream of the converter. This only depends on the second reference voltage to which the output voltage is compared for opening the switching element. Therefore, such power consumption measurement is possible even where the first reference voltage to which the input voltage is compared for closing the switching element, is lower than the second reference

voltage.

**[0082]** Figures 7 and 8 show schematic views of microcontrollers adapted to be used according to the invention in its application to measuring the current output downstream of the converter. Figure 7 shows a microcontroller which receives as an input the control voltage  $U_c$  shown in Figure 2. The microcontroller is adapted to measure the duration for which this control voltage remains at a high level. What is required is for this is to count the pulses of an internal clock, the counter being activated during the high state of the control voltage. As indicated with reference to Figure 2, this duration is representative of power consumption downstream of the converter. The circuit of Figure 7 allows a simple measurement of the consumption, without it being necessary to sample the signal in order to determine its minima and its maxima.

**[0083]** Figure 8 shows another circuit based on the observation that in the converter of Figures 1, 3 or 4, the extrema of the output voltage are reached at the times of switching the switching element, and that these switching times are accurately provided by the rising and falling edges of the control voltage of the switching element. The microcontroller of Figure 8 therefore receives as inputs the control voltage and the output voltage of the converter. The output voltage is applied to an analog input. In a first example, the control voltage  $U_c$  activates an interrupt of the microcontroller. The latter then measures the output voltage only on the rising and falling edges of the control voltage. In a second example, the control voltage  $U_c$  directly activates the sampling control on its rising and falling edges. In one case as in the other, the output voltage does not have to be continuously sampled for determining its extrema, and it is possible to easily determine power consumption downstream of the converter. The converter proposed above therefore makes it possible to measure the consumption more simply, without requiring complete sampling of any signal

**[0084]** Figures 9 and following describe downstream operating methods applicable to devices such as actuators, to which power is supplied by converters such as described in reference to Figures 1, 3 and 4. These methods enable data to be transmitted from the devices. One or more converters of the type described above is or are assumed to be connected to the same power supply line on the AC mains. The problem, as stated above, is to transmit a signal upstream from one of the converters, for example, to the electrical switchboard of the supply line. The actuators using a converter according to the invention are, for example, motors comprising control electronics, to which power is supplied by the converters. The terms "load" or "actuator" are also used herein to designate devices connected at the output of the converters, and to which power is supplied by the converters.

**[0085]** The solution proposed here is based on the observation that the current  $i_e$  input to the converter, shown

in Figure 2, has rising and falling edges coinciding with the rising and falling edges of the control signal. The timing of these current edges is therefore also representative of the consumption of a device connected to the converter. A variation in consumption may be detected upstream by a simple measurement of the current supplied to the converter.

**[0086]** At rest, each device receives a current and therefore causes upstream of the converter a line current or input current  $i_e$  whose shape is shown in Figure 5 of Lewis, or in Figure 2 of EP-A-0 763 878 (Helfrich 1995). This current is in the form of a series of pulses, 2 or 4 pulses over one period of the mains, as a function of half- or full-wave rectification. As explained above, for the dual-threshold converters of the type described in Figures 1, 3 and 4, the duration of the pulse (or of the dual pulse) is the same as that of the control voltage. This duration is directly related to the consumption of the converter and of its associated load.

**[0087]** In the case of full-wave rectified devices, a first waveform  $iL_1$  of the line current  $i_e$  will be attained for the rest state, and a second form  $iL_2$  of this current will be attained in the active state, as shown in Figure 2. The over-consumption may be due, for example, to the fact that the device in the active state supplies a relay coil enabling the motor of the actuator. It is possible for the consumption to be determined remotely from the pulse shape. It is possible to measure the duration of each pulse. It is also possible, since each pulse starts at a particular temporal position, to measure the time difference between consecutive pulses. Thus, the difference between the falling edge of one pulse and the rising edge of the following pulse is measured. In the example of Figure 2, a duration  $T_1 = t_3 - t_2$  is obtained for a first consumption, and a duration  $T_2 = t_7 - t_6$  is obtained for a second consumption. It should be noted that if the supply device controls a motor, the total line current  $i_e$  then corresponds to the superposition of the current  $iL_2$  and of the current  $iM$  absorbed by the motor, this latter current being sinusoidal.

**[0088]** It is therefore clearly possible, by measuring the current supplied to a converter to determine the consumption of a device connected to the output of this converter. This enables data to be transmitted, by acting on the consumption of the device in order to vary the current supplied to the converter. It is therefore possible to transmit data from a device connected to the output of a converter to any point of the line supplying the converter with AC current.

**[0089]** By way of example, it is possible to detect an alarm or a fault in the device to which power is supplied by the converter. All that is required for this is that the consumption of the device varies in the case of an alarm or fault. For example, provision may be made for the device to be programmed to supply power to a passive element in the case of an alarm or fault, or more generally, of data to be transmitted. The corresponding variation in duration between pulses of the input to the con-

verter enables the alarm or the fault to be remotely detected. In this case, an over-consumption, i.e. an increase in the pulse duration or a reduction in the duration separating the pulses, is detected. It could also be decided to decrease the consumption, either deliberately or simply by taking the device out of the circuit, which would have the effect of decreasing the pulse duration, or of increasing the duration between two successive pulses.

**[0090]** The method also functions in the presence of a plurality of converters and of associated devices, connected in parallel on the same power supplying line. The converters and the devices may be identical, or at the very least, may have identical pulse durations. It is assumed that the devices are at rest, i.e. in the state where the duration between pulses is  $T_1$ . As explained above, it would also be possible to consider the pulse duration. The duration between pulses is considered by way of example herein. The superposition of the rest currents of all the devices causes a resulting pulsed current of higher amplitude, the amplitude being given by the sum of the amplitudes of the various individual currents, but still characterized by the duration  $T_1$ .

**[0091]** Figure 9 shows a partial graph of the input current to a converter, in a first operating state, characterized by a duration  $T_1$  between two pulses. In the figure, only the end of one pulse and the start of the following pulse are shown. Figure 10 shows a graph of the current input to three identical converters, all in the same first operating state. As indicated above, the duration between two pulses is still  $T_1$  - but the amplitude of the current is higher.

**[0092]** Now it is assumed that an alarm, a fault or a motor start-up, is detected by one of the devices. The latter is, for example, programmed to supply power to a passive element upon a fault, which causes an over-consumption characterized by a duration  $T_3$  between two pulses, where  $T_3 < T_1$ , according to the measurement convention adopted. A current having the shape shown in Figure 11 is then measured on the supply line. The time between successive pulses is now  $T_3$ , at least when the current is nearly zero.

**[0093]** It is possible to take a duration  $T_3$  equal to the duration  $T_2$  corresponding to another operating mode. Similarly, two different values may be preferred. If a duration  $T_3 = T_2$  is taken, the difference between starting up a device, which leads to an over-consumption and a reduction in the duration at  $T_2$  - and an alarm, which has the same effect, cannot be distinguished. If the two durations are different, it is possible to differentiate between start-up of a device and an alarm generated by this device. It is understood that it is generally possible to detect a variation in consumption, and that this variation may take different values depending on requirements. It could be possible, for example, to generate various over-consumptions using various passive elements, by connecting one or more of these elements to the output of the converter. This is only one example of

a code allowing transmission of data from a device supplied in power by the converter through the supply line of the converter. It is possible to choose various over-consumptions for the devices supplied by the various converters. This would make it possible to identify, in the case of data transmission by a device, which of the devices has transmitted the data, by a single measurement of the duration separating the pulses. It would also be possible to detect a simultaneous alarm on various converters, if required, by analyzing the pulse shape.

**[0094]** Upstream, a pulse-width detector or a detector of the time separating the pulses may be used for detection. Such a detector is placed upstream on the common input line. This detector may be designed to be activated as soon as the current exceeds a given threshold, less than the amplitude of the pulses produced by just one of the devices at rest. The time measurement may be carried out by a microcontroller. If necessary, synchronization on the mains removes any ambiguity, this synchronization being even simpler because the timing of the rising edge of a current pulse relative to the sinusoidal input voltage is known.

**[0095]** Producing the detector calls on known techniques. Figure 12 shows an example of a detector. The latter comprises an optical coupler 50, with enough gain to work in saturation when just one of the devices is supplied, with its rest consumption. Diodes 52, 54, 56 placed in parallel on the LED of the optical coupler make it possible to divert the current when it exceeds the level which the LED can withstand. The voltage measured at the terminals of the optical coupler provides a signal representative of the current.

**[0096]** The current sensor may also be a pulse transformer, or any device capable of eliminating the 50 (60) Hz or 100 (120) Hz components, highlighting the sharp edges at the start and end of the pulses. It then becomes possible to detect data, even superimposed on the supply current.

**[0097]** In this case, this situation is all the more advantageous since the principle of power supply ensures that the current spikes are located at times close to the time when the main voltage goes to zero; this is favorable to the measurement.

**[0098]** The alarm or fault detection electronics compares the duration  $T$  measured to a fixed threshold  $T_A$  between the values  $T_1$  and  $T_3$ . The duration  $T_1$  may be acquired by learning. The discrimination threshold of an alarm,  $T_A$ , is deduced therefrom by a given offset.

**[0099]** In a product configuration phase, the state feedback may also be encoded by a series of different states  $T_1$ ,  $T_3$ . From this point of view, it is clear that the second embodiment, with temporal detection, has advantages. Furthermore, it should be noted that this form makes it possible to discriminate clearly between a consumption state leading to a duration  $T_3$  (alarm) which is different from  $T_1$  (rest) and  $T_2$  (motor actuation). Under these conditions, the fault detection can be continuously active, without it being necessary to validate it by an

alarm or detection mode under overall control. Finally, the second embodiment lends itself more easily to encoding the transmission of a series of binary data, as described in Pezzolo.

**[0100]** Of course, the invention is not limited to the embodiments given above. Thus, the load capacitor may be produced in different ways, and may include, for example, several discrete components. Functionally, it is a capacitor, and it is therefore denoted as such. Similarly, the current limiting element may also comprise one or more coils with one or more iron cores. In the examples, the terminals of the capacitor constitute the output terminals of the converter; there is nothing to prevent other elements being provided in parallel or in series with the capacitor, since the output voltage arises from discharging the capacitor.

**[0101]** It is indicated above that the conducting state of the switching element depends "exclusively" on the upstream voltage, or input voltage, or rectified input voltage. It is also indicated that the non-conducting state depends "exclusively" on the downstream voltage, or output voltage, or voltage at the terminals of the capacitor. In either case, this may not be exactly precise because both the conducting state and the non-conducting state may depend on other factors, for example, reference voltages V1 and V2 in the circuit of Figure 1, the values of the resistors forming the voltage divider, or other factors. It is therefore necessary to understand the term "exclusively," as used herein, means that the conducting state depends on the upstream voltage, without being a function of the downstream voltage, and that the non-conducting state depends on the downstream voltage, without being a function of the upstream voltage.

**[0102]** In the circuit of Figures 1, 3 and 4, the current limiter is located upstream of the series circuit of the switching element and of the capacitor, and upstream of the input of the control circuit. This position has no impact on the operation of the current limiter. Because of this, the current limiting function is provided as soon as the current limiter is in series with the switching element and the capacitor. This position also has no effect on the conducting state. It would be possible to measure the voltage controlling the conducting state at the terminals of the series circuit of the current limiter, of the switching element and of the condenser, without this changing the overall operation of the device described in Figure 1. This is because when the switching element is not conducting, the voltage at the terminals of the voltage limiter is zero. It would therefore be possible to place the voltage limiter, or a part thereof, between the input terminal of the control circuit and the switching element.

**[0103]** However, the proposed position of the voltage limiter has the advantage of providing, in the circuit of Figure 4, the cumulative effect described above. If the voltage limiter or a part thereof is placed between the input of the control circuit and the switching element, the circuit does not benefit from this cumulative effect.

**[0104]** The converter of Figures 1, 3 and 4 enables a

simple measurement of the consumption, and simple data transmission along the power supply line to the converters. This measurement and this transmission could also be implemented with known converters. Their implementation would be made more complex, to the extent that these converters of the prior art do not have a conducting state which is known in advance at any precise moment, like those described above.

**[0105]** The description given with reference to Figure 9 onwards in the example of full-wave rectification is also applicable to the example of half-wave rectification.

## Claims

1. A voltage converter with input terminals, having,
  - a series circuit between the input terminals, the series circuit comprising a switching element (4) and a capacitor (6), the discharge of the capacitor supplying the output voltage of the converter,
  - a control circuit (8, 20) adapted to control the conducting state of the switching element exclusively as a function of the input voltage and adapted to control the non-conducting state of the switching element exclusively as a function of the output voltage.
2. The converter of claim 1, wherein the control circuit is adapted to control the conducting state of the switching element when the input voltage is less than a first threshold (V1).
3. The converter of claim 1 or 2, wherein the control circuit is adapted to control the non-conducting state of the switching element when the output voltage is greater than a second threshold (V2).
4. The converter of claim 2 and 3, wherein the first threshold is higher than the second threshold.
5. The converter of one of claims 1 to 4, further comprising a half-wave or full-wave rectifier, the output of which supplies the series circuit.
6. The converter of one of claims 1 to 5, further comprising a current limiting element in series with the series circuit.
7. The converter of one of claims 1 to 6, wherein the switching element comprises an input terminal (D), an output terminal (S) and a control terminal (G), the control voltage supplied by the control circuit (8, 20) being applied between the control terminal (G) and the output terminal (S), and wherein the switching element has a substantially constant conducting threshold (VT) between the control (G) and output

(S) terminals, the switching element becoming conducting between the input terminal (D) and the output terminal (S) when this conducting threshold (VT) is reached.

8. The converter of one of claims 1 to 7, wherein the switching element is a MOS transistor.

9. The converter of claim 7 or 8, wherein the control circuit (20) has a single input connected to one terminal of the series circuit, one output connected to the control terminal of the switching element, and wherein the other terminal of the series circuit is connected to ground.

10. The converter of claim 9, wherein the control circuit comprises

- a voltage source (22), driven by the input, adapted to deliver a voltage which remains substantially constant while the input voltage is greater than a first threshold, and otherwise decreases,
- a second capacitor (24), one terminal of which is connected to ground, and
- a controlled inverter (26), the swivel of which is connected to the other terminal of the second capacitor and which is adapted to selectively connect the second capacitor (24) to the voltage source (22) in a first position, and to the output of the control circuit in a second position.

11. The converter of claim 10, wherein the controlled inverter is adapted to toggle from the first position to the second position when the voltage delivered by the voltage source decreases.

12. The converter of claim 10 or 11, wherein the controlled inverter is adapted to toggle from the second position to the first position when the output voltage is greater than a second threshold.

13. The converter of claim 10 or 11, wherein the controlled inverter is adapted to toggle from the second position to the first position when the difference between the output voltage of the control circuit and the output voltage of the converter is less than the threshold (VT) of the switching element.

14. The converter of one of claims 10 to 13, wherein the controlled inverter (26) comprises

- a diode (34) between the voltage source (22) and the second capacitor (26),
- a second transistor (36) of the bipolar type, the transmitter of which is connected to the second capacitor (26) and the collector of which is connected to the output of the control circuit, and

- a resistor (38) between the voltage source and the base of the second transistor.

15. The converter of claim 14, wherein the voltage source (22) comprises a Zener diode (32) between the earth and the terminal of the diode (34) which is not connected to the second capacitor (26), wherein the Zener diode is connected to the input of the control circuit through a resistor (28), and placed in parallel with another resistor (40).

16. The converter of one of claims 1 to 15, further comprising means for measuring the temporal position of at least one falling edge of the control voltage applied to the switching element.

17. The converter of one of claims 1 to 15, further comprising means for measuring the value of the output voltage, the measuring means being controlled by the control voltage applied to the switching element.

18. A combination of a converter according to one of claims 1 to 17 and of a load fed with voltage by the output voltage of the converter.

19. The combination of claim 18, wherein the load has means to generate overconsumption.

20. The combination of claim 18, wherein the load has at least one passive element selectively supplied by the output voltage.

21. A unit having:

- a sensor of current pulse-width or a sensor of the time separating current pulses;
- at least one combination according to claim 18, 19 or 20.

22. A method of transmitting data between at least one combination according to claim 18, 19 or 20 and a detector placed on an electrical supply line of the converter of the combination or combinations, comprising:

- varying the consumption of the load of a combination;
- detecting a variation in the temporal position of at least one current pulse using the detector.

23. The method of claim 22, wherein the detection step comprises using the detector for detecting a variation in the temporal width of at least one current pulse.

24. The method of claim 22, wherein the detection step comprises using the detector for detecting a variation in the time between the falling edge of a pulse

and the rising edge of the following pulse.

25. The method of claim 22, 23 or 24, wherein the data is an alarm.

5

26. The method of claim 22, 23 or 24, wherein the data is the normal operation of a load.

10

15

20

25

30

35


40

45


50

55



FIG\_1

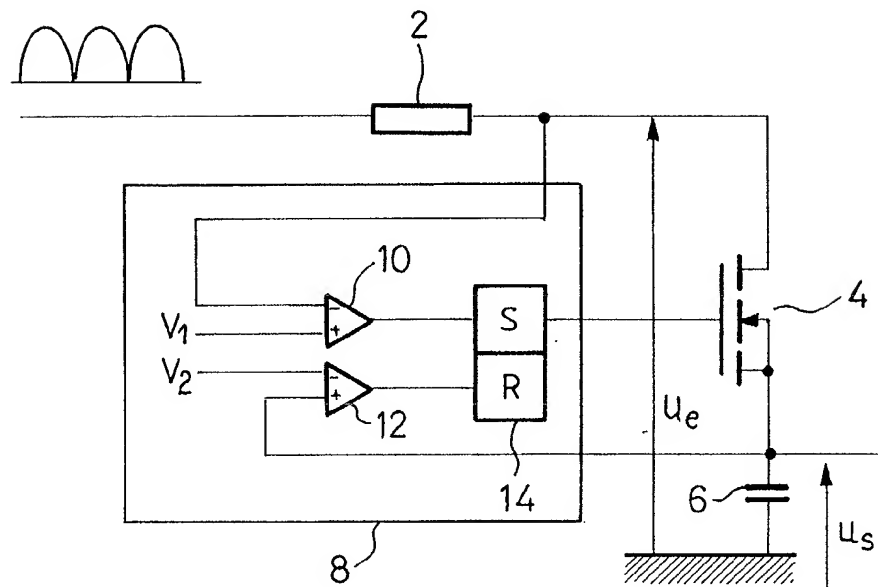


FIG\_4

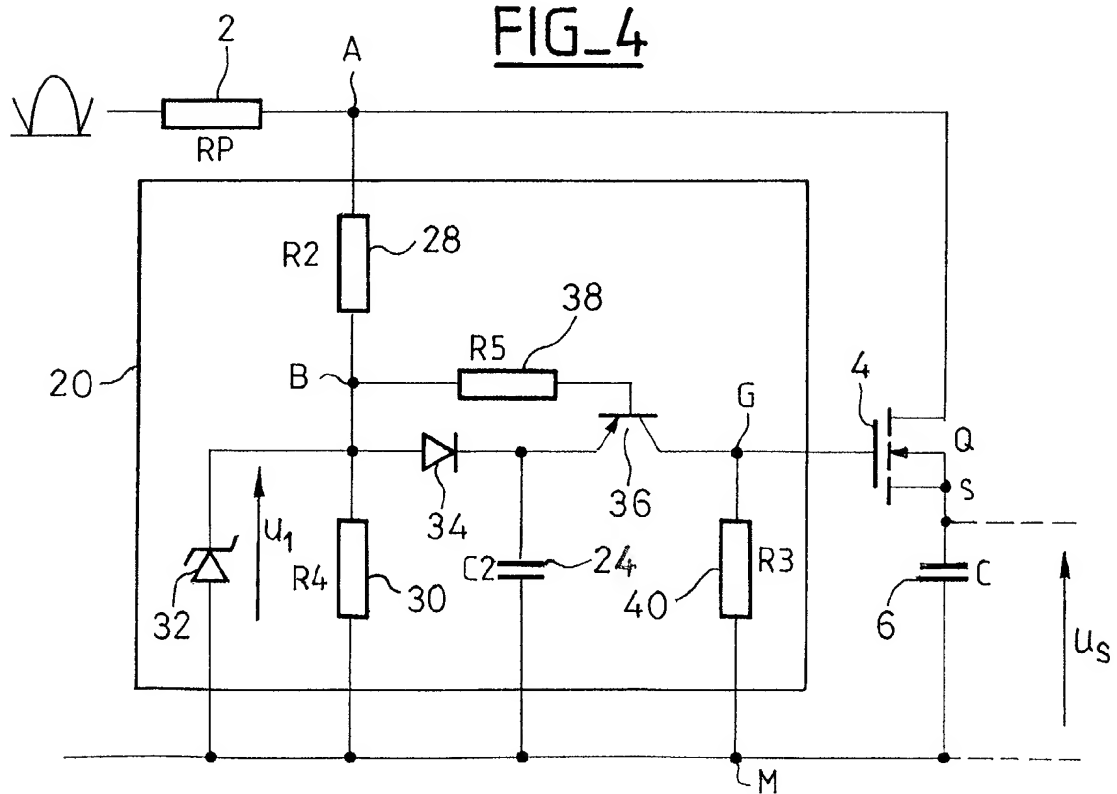




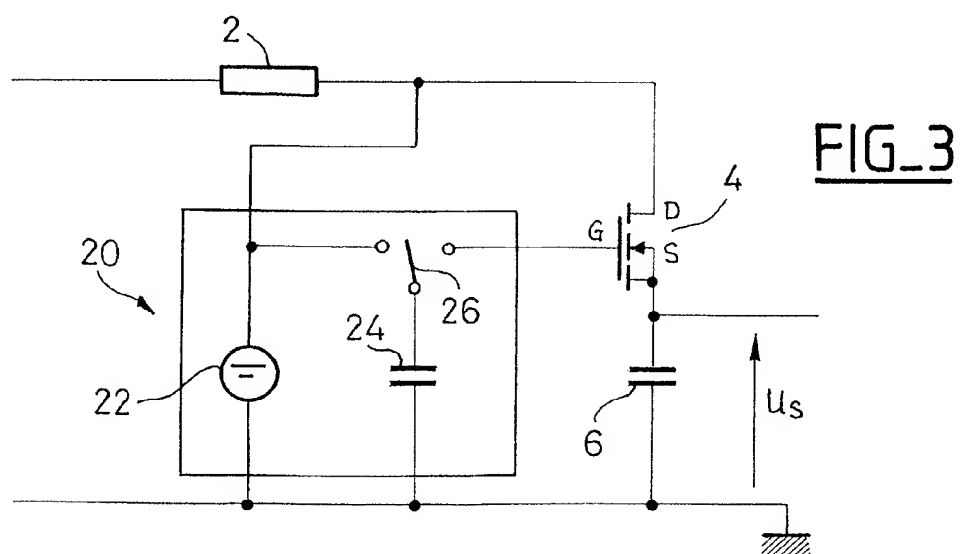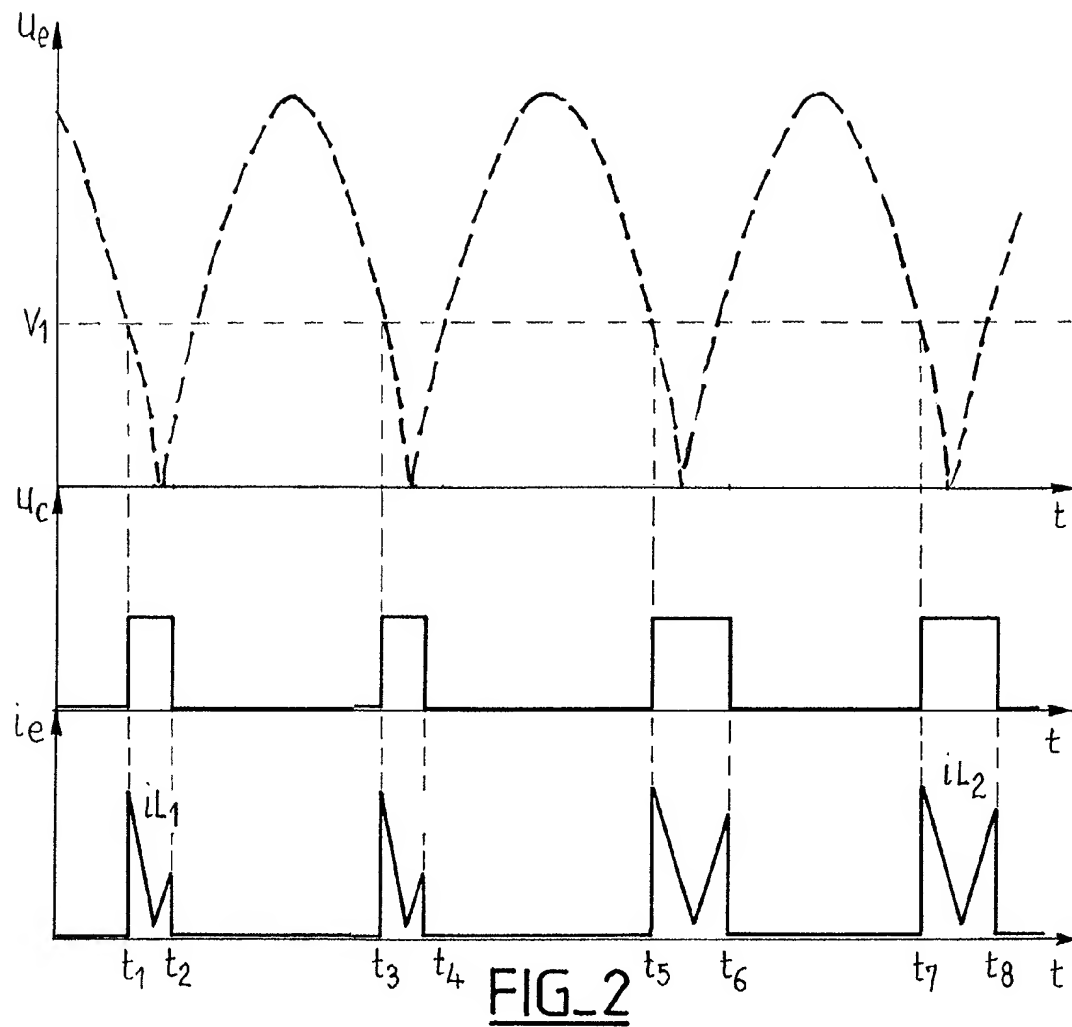


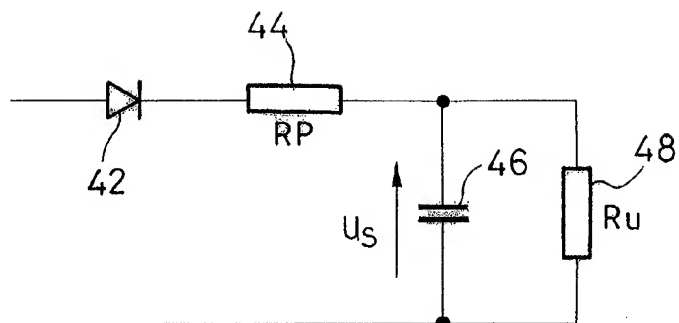


FIG\_5

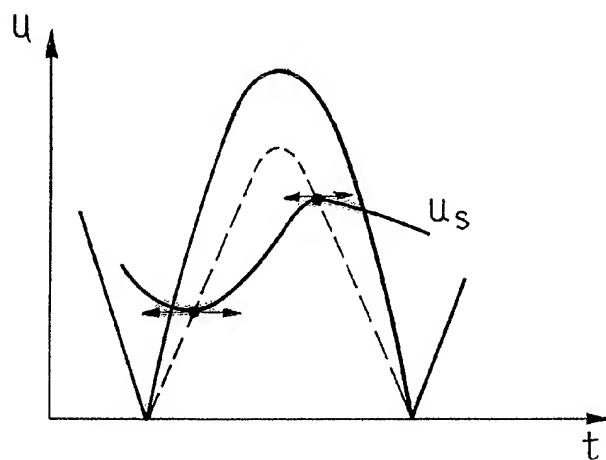

FIG\_6

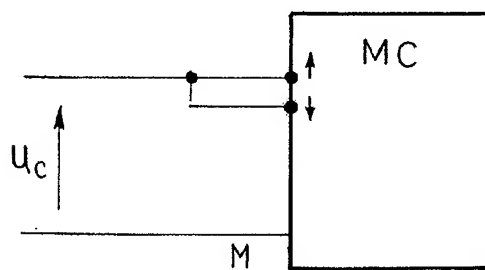


FIG\_7

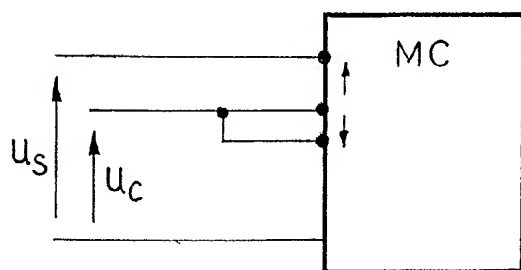


FIG\_8

FIG\_9

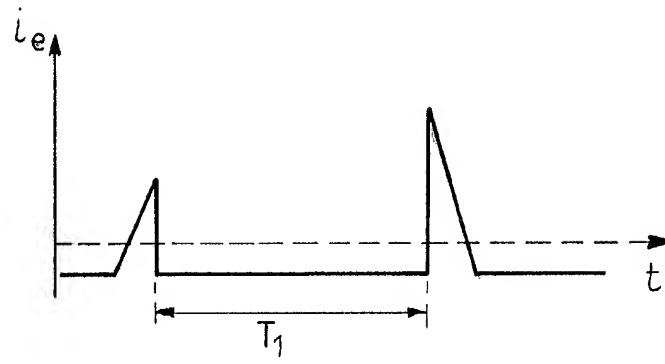

FIG\_10

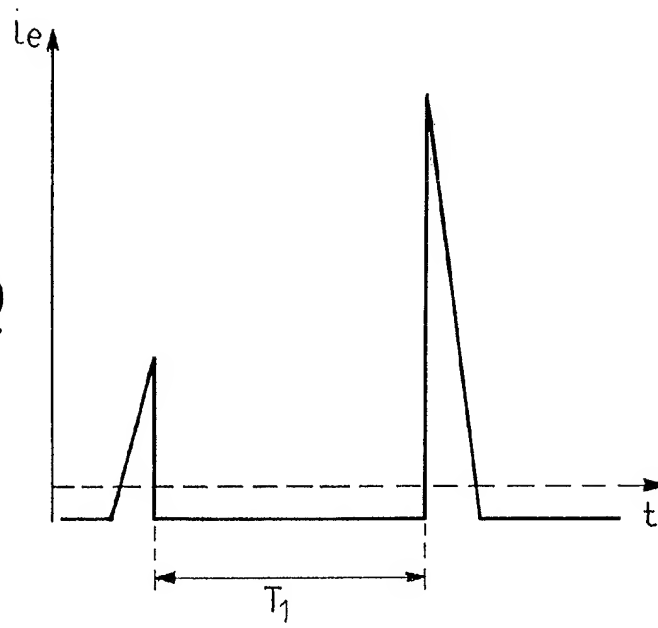

FIG\_11


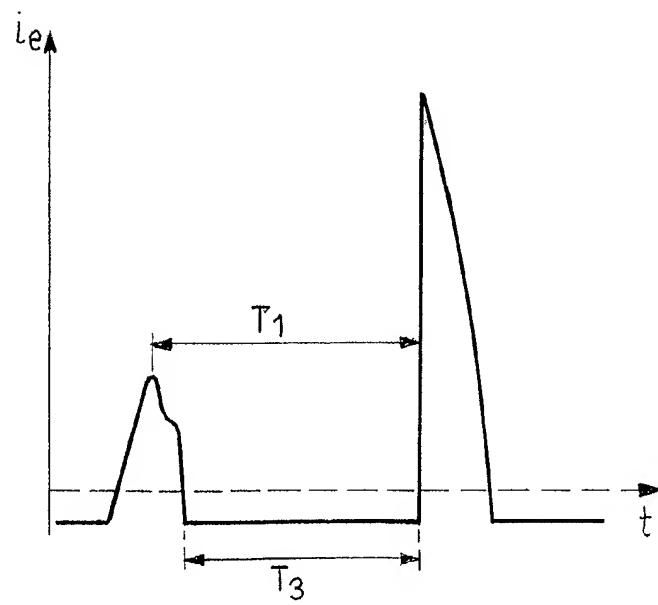


FIG. 12



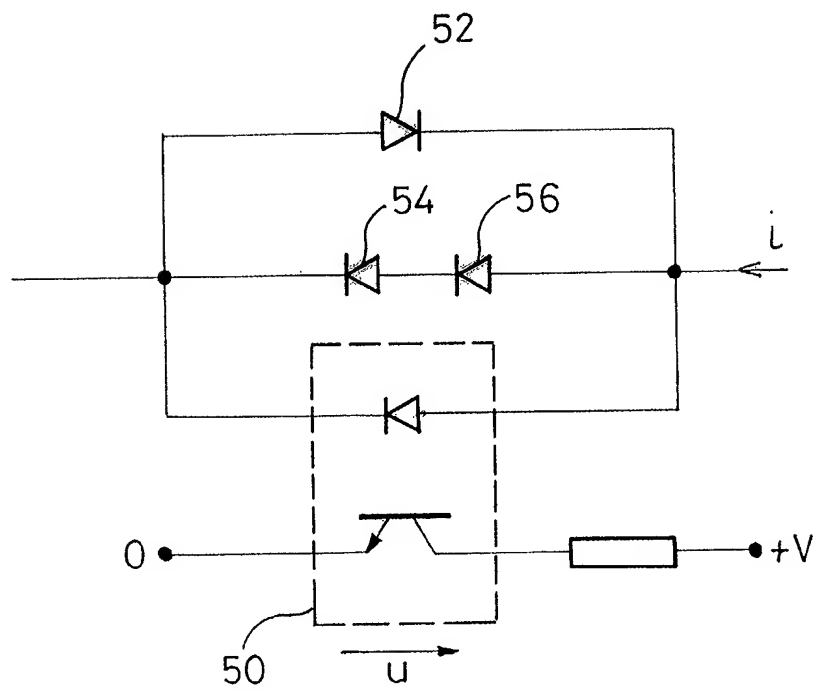

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
08.09.2004 Bulletin 2004/37

(51) Int Cl.7: H02M 7/217

(43) Date of publication A2:  
12.02.2003 Bulletin 2003/07

(21) Application number: 02292011.0

(22) Date of filing: 09.08.2002

(84) Designated Contracting States:  
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
IE IT LI LU MC NL PT SE SK TR  
Designated Extension States:  
AL LT LV MK RO SI

(71) Applicant: **Somfy SAS**  
74300 Cluses (FR)

(72) Inventor: **Bruno, Serge**  
74460 Marnaz (FR)

(30) Priority: 10.08.2001 FR 0110732

(74) Representative: **Cabinet Hirsch**  
58, avenue Marceau  
75008 Paris (FR)


(54) **Unregulated electrical converter**

(57) An AC-DC voltage converter includes input terminals with a series circuit connected between the input terminals. The series circuit includes a switching element and a capacitor. The discharge of the capacitor supplies the output voltage of the converter. A control circuit controls the operation of the switching element so that the conducting state of the switching element is

controlled exclusively as a function of the input voltage, while the nonconducting state of the switching element is controlled exclusively as a function of the output voltage.

The converter has a good dynamic range and allows accurate measurement of current consumption at the output.

**FIG\_1**

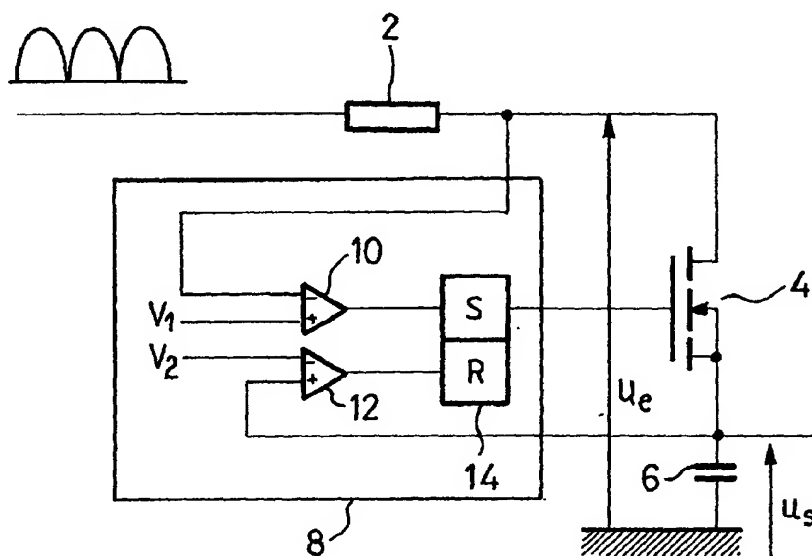



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 02 29 2011

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.CI.7)
X	US 5 818 708 A (WONG STEPHEN L) 6 October 1998 (1998-10-06)	1-3,7-9, 18-20	H02M7/217
A	* the whole document *	4,10-15	
X	FR 2 785 735 A (ST MICROELECTRONICS SA) 12 May 2000 (2000-05-12)	1,3,5-8, 18-20	
A	* the whole document *	2,4,9-15	
A	WO 96/09687 A (ABBOTT LAB) 28 March 1996 (1996-03-28)	1-15, 18-20	
A	* the whole document *		
A	EP 0 651 499 A (TOKYO SHIBAURA ELECTRIC CO) 3 May 1995 (1995-05-03)	1-15, 18-20	
A	* the whole document *		
A	EP 0 399 598 A (PHILIPS NV) 28 November 1990 (1990-11-28)	1-15, 18-20	
A	* the whole document *		
A,D	US 4 755 792 A (MITASEV BLAZO A ET AL) 5 July 1988 (1988-07-05)	16,21-26	TECHNICAL FIELDS SEARCHED (Int.CI.7)
	* the whole document *		H02M
A,D	US 4 121 201 A (WEATHERS PAUL) 17 October 1978 (1978-10-17)	16,21-26	
	* the whole document *		
A,D	US 3 852 740 A (HAYMES I) 3 December 1974 (1974-12-03)	16,21-26	
	* the whole document *		
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
The Hague		19 July 2004	Thisse, S
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 29 2011

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

19-07-2004

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5818708	A	06-10-1998	EP 0888666 A1	07-01-1999
			WO 9826498 A1	18-06-1998
			JP 2000505997 T	16-05-2000
FR 2785735	A	12-05-2000	FR 2785735 A1	12-05-2000
WO 9609687	A	28-03-1996	AU 696737 B2	17-09-1998
			AU 3682595 A	09-04-1996
			CA 2197322 A1	28-03-1996
			EP 0782786 A1	09-07-1997
			JP 10506257 T	16-06-1998
			WO 9609687 A1	28-03-1996
			US 5801933 A	01-09-1998
EP 0651499	A	03-05-1995	JP 3126565 B2	22-01-2001
			JP 7131318 A	19-05-1995
			DE 69425714 D1	05-10-2000
			DE 69425714 T2	12-04-2001
			EP 0651499 A2	03-05-1995
			KR 175341 B1	01-05-1999
			US 5646514 A	08-07-1997
EP 0399598	A	28-11-1990	GB 2233171 A	02-01-1991
			EP 0399598 A2	28-11-1990
			JP 3018276 A	25-01-1991
			US 5055994 A	08-10-1991
US 4755792	A	05-07-1988	AU 585025 B2	08-06-1989
			AU 5858886 A	18-12-1986
			CA 1260100 A1	26-09-1989
			CA 1274890 A2	02-10-1990
			EP 0206483 A2	30-12-1986
			FR 2583552 A1	19-12-1986
			JP 61288297 A	18-12-1986
US 4121201	A	17-10-1978	NONE	
US 3852740	A	03-12-1974	NONE	